


SERIE WA. EQUIPOS MULTIOPCIONALES

WA SERIES. MULTI-OPTIONAL EQUIPMENT · SÉRIE WA. APPAREILS MULTIOPTIONNELS



Aplicación recomendada para sector agrícola-ganadero.
Specially recommended for agricultural and livestock sector.
Spécialement recommandé pour secteur agricole et d'élevage

MODELO MODEL MODÈLE	POTENCIA CALORÍFICA ÚTIL HEAT NET POWER PUISSANCE CALORIFIQUE UTILE		POTENCIA ÚTIL NET POWER P. CALORIFIQUE Kw	CAUDAL DE AIRE AIR FLOW DÉBIT D'AIR m³/h	PRESIÓN PRESSURE PRESSION Pa		TENSIÓN VOLTAGE TENSION	NIVEL SONORO SOUND LEVEL NIVEAU SONORE dB(A) 1m	MOTOR VENTILADOR FAN MOTOR MOTEUR VENT. Kw	PESO WEIGHT POIDS Kg
	kcal/h	Kw			AXIAL	CENTRÍFUGO CENTRIFUGE				
WA-55	55.000	0,75	58	3.600	73	75	II-230-50	73	0,75	117
WA-90	90.000	1,5	95	8.200	75,5	150	III-230/400-50	74	1,5	195
WA-150	150.000	2,2	158	11.800	86	150	III-230/400-50	86	2,2	310

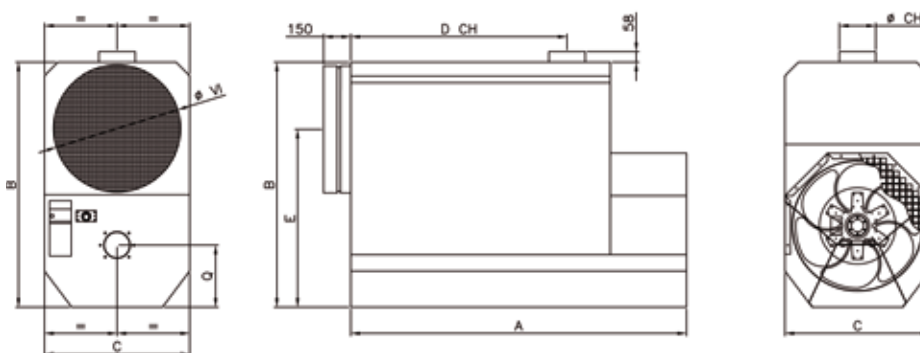

MEDIDAS · MEASUREMENT · MESURES (mm)									
MODELO MODEL MODÈLE	A		B	C	D CH	Ø CH	E	Q	Ø VI
	AXIAL	CENTRÍFUGO CENTRIFUGE							
WA-55	1.125	1.510	760	560	965	150	610	217	350
WA-90	1.500	1.622	1.100	650	915	150	785	299	600
WA-150	1.850	2.010	1.350	800	1.192	200	985	345	700

OPCIONALES / OPTIONS / EN OPTION

Ventilador centrífugo

Centrifugal fan / Ventilateur centrifuge

Kit portátil (ruedas + tiradores)

Portable kit (wheels + handles) / Kit portable (roue + poignée)












Kit soporte colgar (cáncamos para colgar)

Hangable kit (with eared screws to be hung) / Kit palier pendent (cheville à œuil)

Visera quemador

Burner cover / Visière brûleur

EMBOCADURAS / OUTLET / SORTIES

EQUIPO		MODELO / MODEL / MODÈLE
WA-55		Embocadura impulsión estándar Ø=350
		Nozzle outlet
		Sortie impulsion
		Impulsión rejillas Horizontal o Vertical
		Grids outlet Horizontal or Vertical
		Impulsion grilles Horizontal ou Vertical
		Embocadura impulsión 500x300
		Nozzle outlet
Sortie impulsion		
	Impulsión 2 toberas Ø=250	
	2 nozzle outlet	
	Impulsion 2 sorties	
WA-90		Embocadura impulsión estándar Ø= 600
		Standard nozzle outlet
		Sortie impulsion standard
		Impulsión 4 toberas Ø=250
		4 nozzle outlet
		Impulsión rejillas Horizontal o Vertical
Grids outlet Horizontal or Vertical		
Impulsion grilles Horizontal ou Vertical		
WA-150		Embocadura impulsión estándar Ø=700
		Standard nozzle outlet
		Sortie impulsion standard
		Embocadura impulsión Ø=600
		Nozzle outlet
		Sortie impulsion
		Impulsión 4 toberas Ø=300
		4 nozzle outlet
		Impulsion 4 sorties
		Impulsión rejillas Horizontal o Vertical
	Grids outlet Horizontal or Vertical	
	Impulsion grilles Horizontal ou Vertical	